



AMAZONLAY-Z®

luxury LVT click flooring


LAY-Z

Overall Gauge 5mm | Wear Layer 0.3mm



LC6101 SNOW DRIFT

Recommended Laying Patterns




Ashlar



Product Specification

Dimensions	230mm x 1220mm
Overall Gauge	5mm
Wear Layer	0.3mm
Packaging	6pcs / 18.10sqft (1.68m ²)

Standard Size

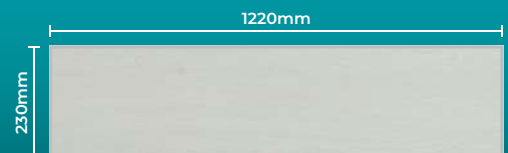


5mm | 0.3mm

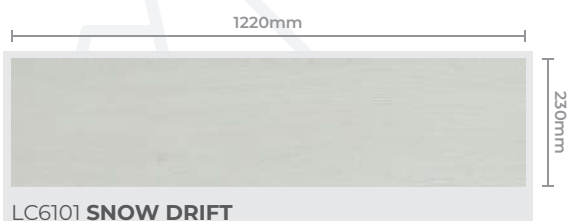

PRODUCT SPECIFICATION

DIMENSIONS	230mm x 1220mm
OVERALL GAUGE	5mm
WEAR LAYER	0.3mm
PACKAGING	6 pcs / 18.10sqft (1.68m ²)

5mm | 0.3mm

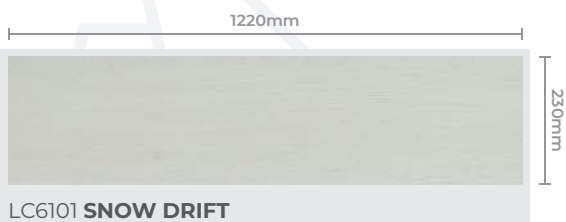

PRODUCT SPECIFICATION

DIMENSIONS	230mm x 1220mm
OVERALL GAUGE	5mm
WEAR LAYER	0.3mm
PACKAGING	6 pcs / 18.10sqft (1.68m ²)




AMAZONLAY-Z®
luxury LVT click flooring

LAY-Z

Overall Gauge 5mm | Wear Layer 0.3mm

5mm | 0.3mm

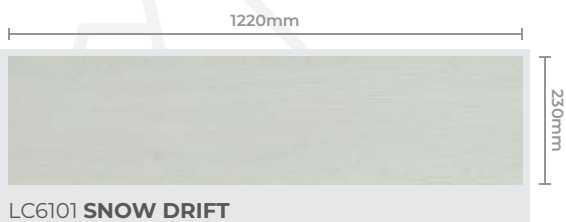

PRODUCT SPECIFICATION

DIMENSIONS	230mm x 1220mm
OVERALL GAUGE	5mm
WEAR LAYER	0.3mm
PACKAGING	6 pcs / 18.10sqft (1.68m ²)



AMAZONLAY-Z®

luxury LVT click flooring

LAY-Z

Overall Gauge 5mm | Wear Layer 0.3mm

PRODUCT SPECIFICATION

Dimensions	230 x 1220mm
Overall Gauge	5mm
Wear Layer	0.3mm
Packaging	6pcs / 18.10sqft (1.68m ²)

PERFORMANCE SPECIFICATION

European Standards	EN 14041:2004/AC:2006 -
	Verification of Conformity to CE Standards
Wear Resistance	EN660-2:1999 (R2018) & EN 649:2011 - Commercial Class
Peel Strength	EN ISO 24345:2012 - Pass on Z & H Direction
Residual Indentation	EN ISO 24343-1:2012 - Minimal 0.04mm
Flexibility	EN ISO 24344-1:2012 Method B - No Cracking
Anti Slip	DIN 51130:2014-02 - Pass @ Class R10
Color Fastness	ISO 105-B02:2014 Cycle A1 & ISO 105
Reaction to Fire	-A02:1993/Cor 2:20005 - Pass Greater than Level 6
Dimensional Stability	EN ISO 23999:2021 - Pass @ X & Y Directions
Curling On Heat	EN ISO 23999:2021 - No Curling
Elemental Migration (Harmful Material)	EN ISO 24343-1:2012 - Pass - Not Detected

ENVIRONMENTAL CERTIFICATIONS



PERFORMANCE & DURABILITY

